



## Dome IR Network Camera 2Mpx with 2.7~13.5mm motozoom lens

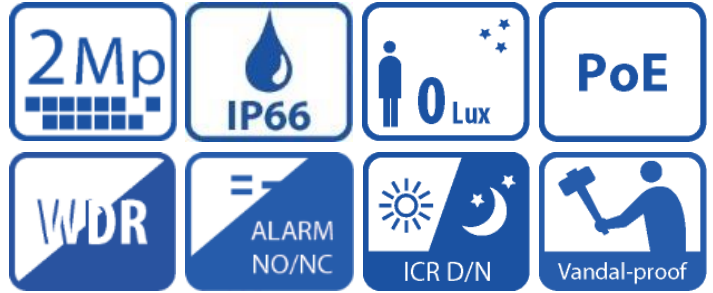

### Key features

- Sensor 1/2.8" 2Mpx PS Starvis CMOS
- Video compression H.265 / H.264 / MJPEG
- Triple video streaming
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 3DNR
- Functions AWB, AGC, BLC, HLC, ROI
- Wide Dynamic Range WDR120dB
- Web-service, support BCS-NVR-Point, CMS(BCS Manager), mobile app BCS(iOS, android), P2P
- Motozoom lens 2.7-13.5mm F1.4 with regulation from Web-Service or buttons inside case
- Camera module 3D-regulation
- IR distance up to 50m
- Intelligent functions: cross line, intrusion, scene change, face detection, missing/abandoned objects, audio detect
- 1 alarm in / 1 alarm out
- 1 audio in / 1 audio out
- Protection IP66 IK10
- Service out CVBS (RCA)
- Edge storage microSD do 128GB
- Power supply 12V DC / 24V AC / PoE(802.3at)

### Dimensions

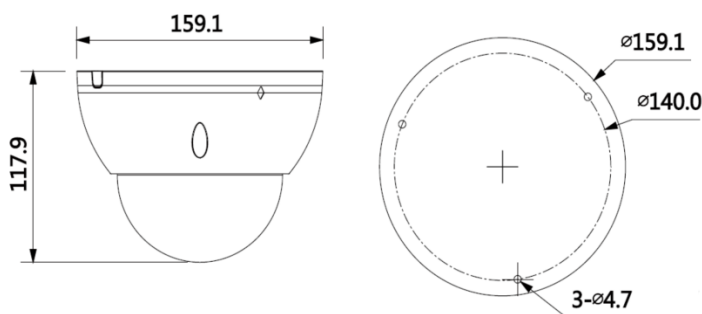

### Specification

Model		BCS-DMIP5201AIR-IV
Scanning system		Progressive Scan
Sensor		1/2.8" 2Mpx Starvis CMOS
Pixels		1920(H)×1080(V)
Min. illumination		0.006Lux/F1.4 (Color,1/3s,30IRE) 0.05Lux/F1.4 (Color,1/30s,30IRE) 0Lux/F1.4(IR On)
S/N ratio		> 50dB
White balance		(AWB) Auto/manual
Basic functions	Lens	Motozoom 2.7-13.5mm F1.4 auto DC Angle of View H:101°~31° V:54°~17°
	Backlight compensation	BLC/HLC/WDR(120dB)/SSA
	Shutter	Auto/Manual (1/3-1/100000s)
	Gain control	(AGC) Auto/Manual
	Noise Reduction	3DNR Of/On - regulation
Additional functions	Motion Detection	On/Off (4 areas, sensitivity, threshold, position, size), grid
	Privacy masking	On/Off (4 areas, position, size)
	Rotation	Mirror, flip 90°, 180°, 270°
	Focus	Auto/manual - regulation
	Day/Night	IR-cut filter with auto switch (ICR)
	IR Leds distance	Up to 50m
Video functions	Compression	H.265 / H.264H / MJPEG
	Resolution	1080P(1920×1080) / SXGA(1280×1024) / 1.3M(1280×960) / 720P(1280×720) / D1(704×576) / CIF(352×288)
	Main stream	1080P/SXGA/1.3M/720P (1~50kl/s)
	Second stream	D1/CIF(1~50kl/s)
	Third stream	1080P/720P/D1/CIF(1~50kl/s)
	Bitrate	H.264: 24K~10240Kbps, H.265: 14K~9984Kbps
	Network	Ethernet
Network	Protocols	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, Multicast, 802.1x,easy4ip
	Mobile	ONVIF, PSIA, CGI
	Users	iOS, android
	Ethernet	Max 20 logged in
	Edge storage	microSD do 128GB
	Functions audio	In/out
Compression		G.711A, G.711Mu, G.726, AAC
Alarm in/out		1/1
Power supply		12VDC / 24VAC / POE (802.3at)
Power consumption		<15W
Working environment		-30°C ~ +60°C
Weight		0.95kg
Dimensions		Φ159.1mm× 117.9mm