

Bullet Network IR Camera 2Mpx with 4mm lens





Key features

- Sensor 1/2.7" 2 Mpx PS CMOS
- Video compression H.265 / H.264 / MJPEG
- Triple video streaming
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D/3D
- Web-service, support BCS NVR-Point, CMS(BCS Manager), mobile app BCS(iOS, android), P2P
- Wide Dynamic Range D-WDR
- Corridor mode
- ROI – Region of Interest
- Functions AWB, AGC, BLC, HLC, Defog
- Intelligent functions: cross line, intrusion, face detect, people counting
- Fixed lens 4mm F1.8
- IR distance up to 30m
- Protection IP66
- Power supply DC12V and PoE (voltage range $\pm 25\%$)

BCS-P-4121R-G-II – dark case

Dimensions

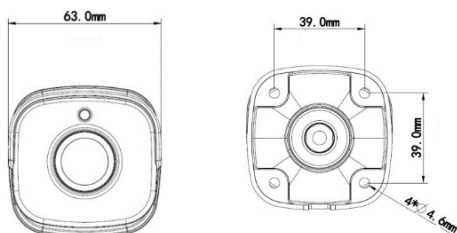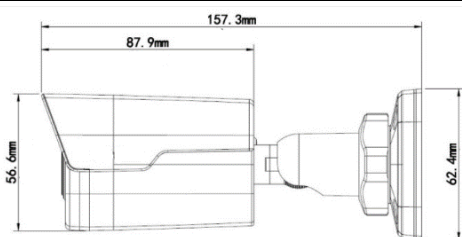

Specification

Model		BCS-P-4121R(-G)-II
Scanning system		Progressive Scan
Sensor		1/2.7" 2 Mpx CMOS
Pixels		1920(H)x1080(V)
Min. illumination		Color: 0.02Lux/F1.8(AGC On) B/W: 0Lux (IR On)
S/N ratio		> 52dB
White balance		(AWB) Auto/Manual
Basic functions	Lens	4mm F1.8 angle of view (H):84.8°
	Backlight compensation	BLC/HLC/DWDR
	Shutter	Auto/Manual (1/6-1/100000s)
	Gain control	(AGC) Auto/Manual - regulation
	Noise Reduction	2D/3D NR - regulation
Additional functions	Motion Detection	On/Off (4 areas, sensitivity, threshold, position, size), grid
	Privacy masking	On/Off (8 areas, position, size)
	Rotation	Mirror, Flip 90°, 180°, 270°
	Focus	Auto
	Day/Night	IR-cut filter with auto switch (ICR)
	IR led distance	Up to 30m
Video functions	Compression	H.265 / H.264 / MJPEG
	Resolution	1080P(1920x1080) / 720P(1280x720) / D1 (720x576) / 2CIF(704x288) / CIF(352x288)
	Main stream	1080P(1~30fps)
	Second stream	1080P/720P/D1/2CIF/CIF(1~30fps)
	Triple stream	D1/2CIF/CIF(1~30fps)
Network	Ethernet	RJ-45 (10M/100M Base-TX)
	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, P2P
	Compatibility	ONVIF(Profile S, Profile G), API
	Mobile	android, iOS
	Users	Max 10 logged in
Power supply		12VDC($\pm 25\%$) / POE (802.3af)
Power consumption		<6.4W
Working environment		-35°C ~ +60°C
Weight		0.45kg
Dimensions		157.3mm × 62.4mm × 63mm